

## CP2976 - Acrylate



### 4-48f ULW Drop Cable Approved for PIA Network

#### Features and Benefits

Sheath:	UV resistant HDPE
Colour:	Black with 2 yellow stripes (1.25mm wide)
Strain relief:	Twisted steel wires in outer wall
Span distance:	Recommended 55m Standard Maximum 68m ( $\leq 0.67\%$ fibre strain)* Exceptional Maximum 85m ( $\leq 0.8\%$ fibre strain)*


\*The strain values when subject to environmental loading, 97kph

Standard fibre types:	Single mode to ITU-T G657A1, ITU-T G657A2, TBC with client
Fibre counts:	4 to 48 (configurations shown below and on page 2)
Fibre attenuation (20°C):	0.35 dB/km max at 1310 nm and 1383 nm 0.21 dB/km max at 1550 nm 0.23 dB/km max at 1625 nm

Design	Version A		
	Fibre Counts	4, 8, 12, 24, 36	
Number of elements including fillers	3	4	
Element type	acrylate bundle, colour coded		
Element identification  (other colours available)	Element colour: (1) blue, (2) orange, (3) green, (4) clear. Fillers, natural, when required.  Single elements natural		
Fibre colours* *Other colours upon request, e.g EIA598	(1) blue; (2) orange; (3) green; (4) red; (5) grey; (6) yellow; (7) brown; (8) violet; (9) black; (10) aqua; (11) pink; (12) white		
Cable mass	38		kg/km
Cable outer diameter	7.0		mm
Bending radius locking*/static/dynamic *when used in conjunction with approved locking bollard PC74523	34/70/140		mm
Tensile strength (elastic limit)	1250		N
Break load	$\geq 1350 - \leq 2000$		N
High voltage test	11		KV

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. Purchase of Emtelle products does not convey any licence under patents or other intellectual property rights owned by third parties. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2022]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. [www.emtelle.com](http://www.emtelle.com)

## CP2976 - Acrylate

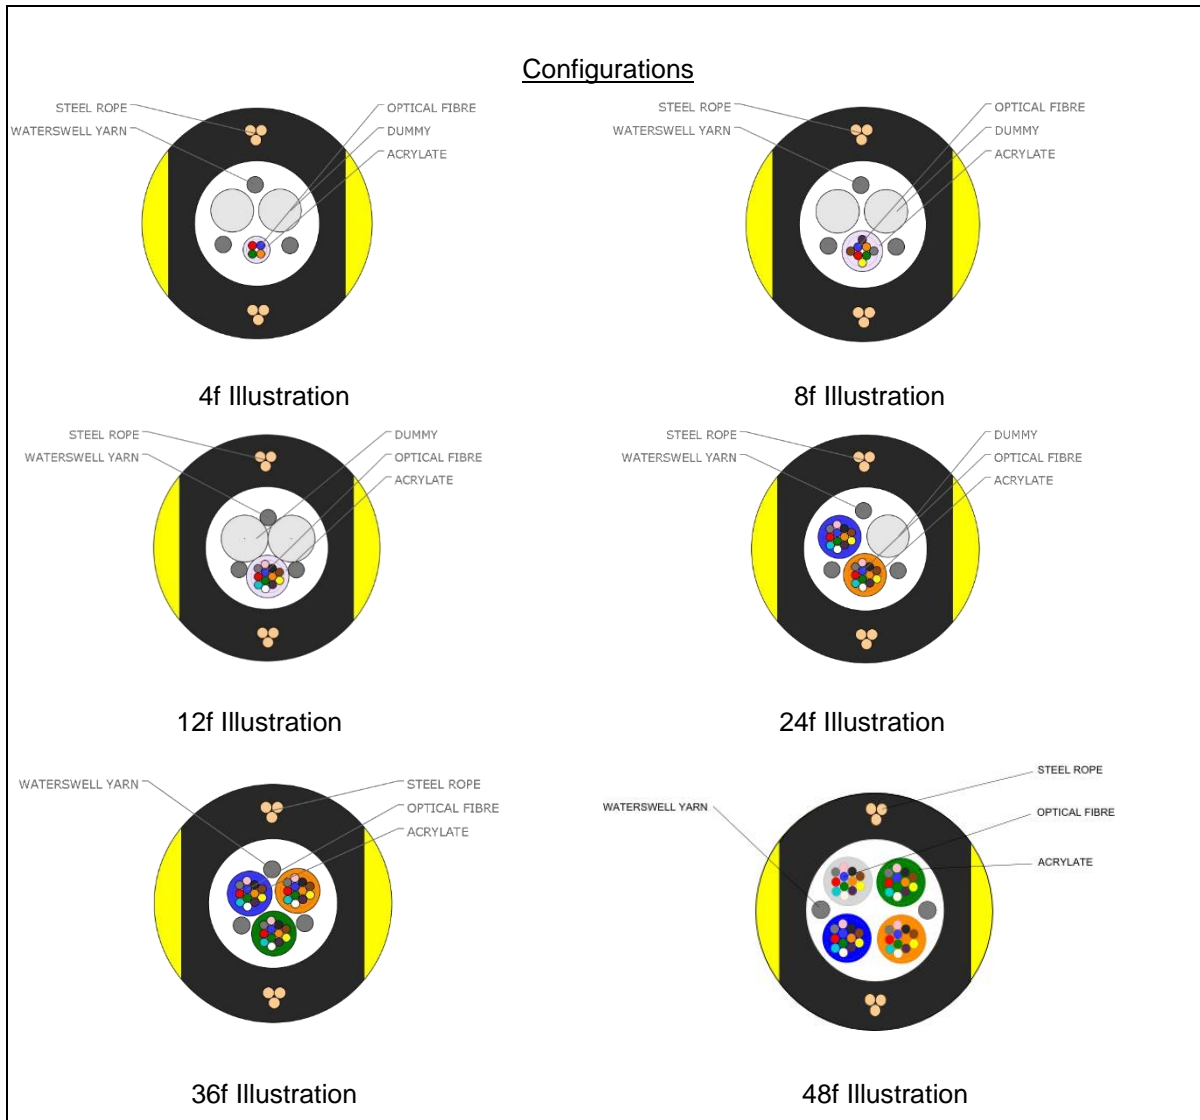

### Mechanical/Electrical Testing

#### Cable Break

The load to break of the cable shall be not less than 1350 Newton's and not more than 2000 Newton's

#### High Voltage test

Product tested for suitability for use under 11kV power cables by testing to 15kV<sub>rms</sub>.

#### Acceptance Criteria

The sample shall be deemed to have passed the test if it withstands 15kV for 5 minutes without breakdown. In the event of the sample withstanding 15 kV for 5 minutes, the test shall be continued for a further 5 minutes, to determine an actual failure point, if any, for the sample.

In the event of the sample not failing after the further 5 minutes testing, then it shall be quoted as >10 minutes.

### Packaging and Labelling

All products suitably packaged in recyclable materials and clearly labelled with Emtelle Product Code and Description where possible.

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. Purchase of Emtelle products does not convey any licence under patents or other intellectual property rights owned by third parties. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2022]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. [www.emtelle.com](http://www.emtelle.com)